


Lightscan – Dynamic ceiling illumination for a wide spatial impression

Floodlighting ceilings in airports, railway stations, arcades and passages

Lightscan facade luminaires give ceilings a light and spacious appearance even in demanding environments such as arcades and railway stations. The robust luminaire's uniform, bright floodlighting enables economical ceiling illumination due to large luminaire spacing. High luminous fluxes and efficient lighting technology ensure an excellent lighting level – especially in high rooms. Two different distributions – wide or narrow – provide the perfect solution for

illuminating wide ceiling areas. The maintenance-free optoelectronics protect resources thanks to their high efficiency and reduce operating costs.

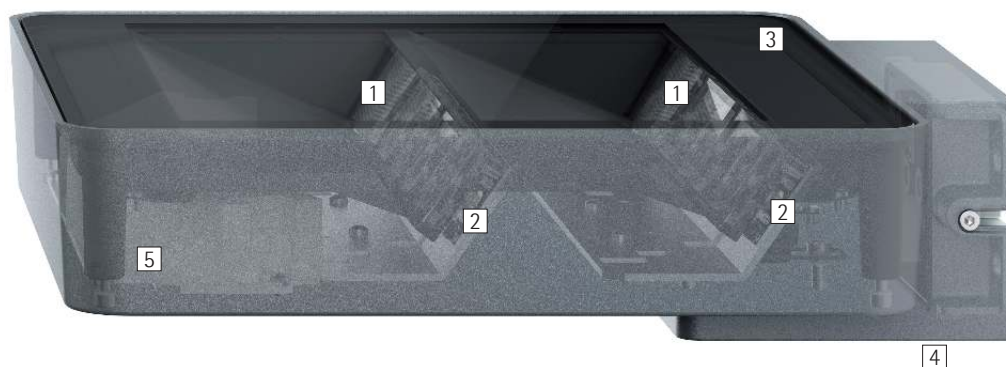

Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

1 ERCO Spherolit lens

- Light distributions: wide beam or deep beam

2 ERCO LED-module

- High-power LED: warm white (3000K) or neutral white (4000K)
- Collimating lens made of optical polymer

3 Cover frame

- Cast aluminium, black powder-coated
- Safety glass

4 Housing and wall plate

- Graphit m
- Corrosion-resistant cast aluminium, No-Rinse surface treatment
- Double powder-coated
- Optimised surface for reduced accumulation of dirt

5 Control gear

- Switchable or DALI dimmable

Protection mode IP65

Dust-tight and water jet-proof

Variants on request

- High-power LEDs: 3000K CRI 97 or 2700K, 3500K, 4000K with CRI 92
 - Housing: 10,000 further colours
- Please contact your ERCO consultant.



Design and application:
www.erco.com/lightscan-f


Lightscan Façade luminaires



Large lumen packages for very high illuminances
 ERCO offers luminaires with large lumen packages for generating very high illuminances.









Different light distributions: wide or deep
 The wide light distribution of ceiling washlights efficiently illuminates cantilever roofs along the facade. The deep beam light distribution of ceiling washlights is ideal for the wide-area illumination of ceilings.









Wide luminaire spacing with ceiling washlighting
 ERCO's efficient photometrics enable selected luminaires to be spaced particularly far apart, thereby minimising the number of luminaires required.

Special characteristics

-  Large lumen packages for very high illuminances
-  Different light distributions: wide or deep
-  Wide luminaire spacing with ceiling washlighting


-  ERCO high-power LEDs
-  Efficient Spherolit technology
-  Different light colours

-  Excellent thermal management
-  EMC-optimised
-  Various construction sizes
-  Protection mode IP65

-  Switchable
-  DALI dimmable

Lightscan Façade luminaires – Luminaire arrangement


Ceiling washlights
Wide beam, Deep beam

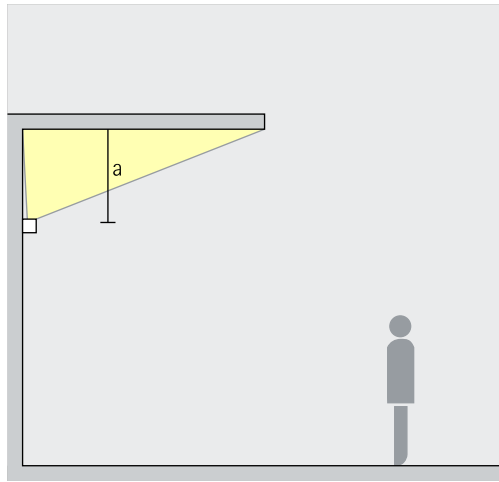

Washlighting

Uniform illumination using Lightscan gives a light and spacious impression to ceilings. The distance (a) of the luminaire to the ceiling determines the luminaire spacing (d) and depends on the design criteria. This distance (a) should be at least 0.8m.

Arrangement: $a > 0.8\text{m}$

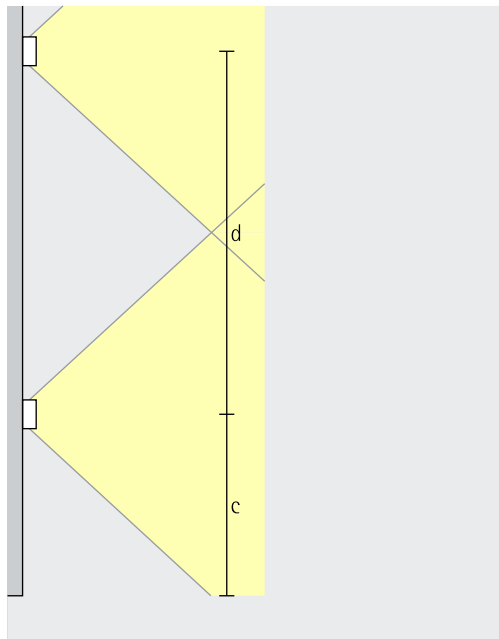



The distance (d) of luminaires with wide beam light distribution may be up to 4 times the ceiling offset (a).

Arrangement: $d = 4 \times a$

The distance (d) of luminaires with deep beam light distribution may be up to 3 times the ceiling offset (a).

Arrangement: $d = 3 \times a$

Lightscan Façade luminaires

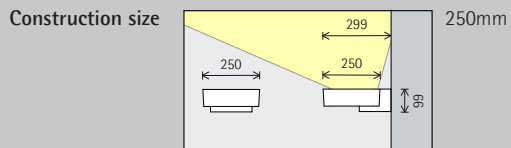

LED module
Maximum value at 4000K CRI 82

24W/3300lm

48W/6600lm

Light colour

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 92		4000K CRI 82
	3000K CRI 97 *		4000K CRI 92 *

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 92		4000K CRI 82
	3000K CRI 97 *		4000K CRI 92 *

Light distribution

	Ceiling washlights
	Wide beam
	Deep beam

	Ceiling washlights
	Wide beam
	Deep beam

Control


	Switchable
	DALI

	Switchable
	DALI







Colour (housing)

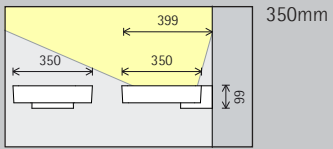

	Graphit m
	10,000 colours *



	Graphit m
	10,000 colours *





72W/9900lm

	2700K CRI 92 *		3500K CRI 92 *
	3000K CRI 92		4000K CRI 82
	3000K CRI 97 *		4000K CRI 92 *

Ceiling washlights	
	Wide beam
	Deep beam

	Switchable
	DALI

	Graphit m
	10,000 colours *

* available on request

Article numbers and planning data:
www.erco.com/015413

Design and application:
www.erco.com/lightscan-f



