

# Pantrac - Lighting effects for walls

## Simple and efficient wallwashing for museums and business


premises. Pantrac exceeds the demands of the ultimate challenge in light-ing design: perfect wallwashing. The system is designed to achieve superb uniform illumination of walls, product shelving or exhibits with total visual comfort. Innovative photometrics optimize its efficiency and, as a result, reduce the number of luminaires required, as these can be spaced further apart.

With its archetypal cubic design, the luminaire integrates as effort-

lessly with modern rooms as with historic architecture. A very wide dimming control range of 1% to 100% supports aesthetic and conservation aspects of artwork protection and gallery appearance.



## Pantrac for 2-circuit track

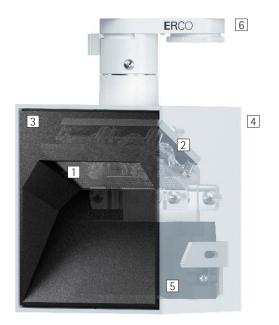

Structure and characteristics The features described here are typical of products in this range. Special ver-sions may offer additional or varying features. A comprehensive description of the features of individual products can be found on our website.

# 1 ERCO Spherolit lens - Light distribution: wallwash

- 2 ERCO LED-module High-power LEDs: warm white (2700K or 3000K) or neutral white (3500K or 4000K)
- Collimating lens made of optical polymer

### 3 Front cover

Polymer, black lacquered

- Housing
  White (RAL9002), black or silver
  Cast aluminum, powder-coated
  Rotatable through 360° on adapter
- 5 Control gear Trailing edge dimmable+On-board
- Dim Dimming with external dimmers (trailing edge) possible and rotary control for brightness control on the \_ luminaire

# 6 ERCO turning adapter for 2-circuit track

Variants on request – Housing: 10,000 further colors Please contact your ERCO consultant.



Design and application: www.erco.com/pantrac


### Pantrac for 2-circuit track



**Outstanding uniformity** Pantrac provides uniform vertical lighting to perfection - whether in prestigious entrance areas, in offices or in museums.



Simple installation Pantrac creates perfect light for wallwashing without additional pivoting.



Large luminaire spacing The high-efficiency Pantrac lighting technology enables luminaire spacing of up to one and a half times the distance to the wall.

### Special characteristics

Outstanding uniformity

d




Easy installation

Wide luminaire spacing with wallwashing






ERCO high-power LEDs



Different light colors











Various construction sizes






3

# Pantrac for 2-circuit track – Luminaire arrangement

Lens wallwashers Wallwash

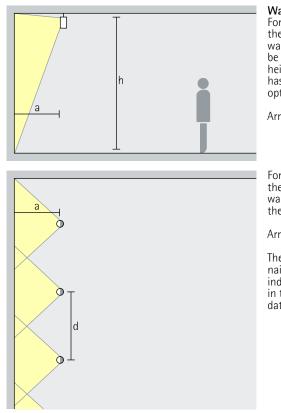

Wallwashing For uniform vertical illuminance, the distance (a) of Pantrac lens wallwashers from the wall should be around one third of the room height (h). The luminaire head has been adjusted precisely for optimum wallwashing.

Arrangement:  $a = 1/3 \times h$ 

For good longitudinal uniformity, the spacing (d) of Pantrac lens wallwashers may be up to 1.5 times the offset from the wall (a).

Arrangement:  $d \le 1.5 \times a$ 

The optimal wall offset and lumi-naire spacing for each product are indicated in the wallwasher tables in the catalogue and the product data sheets.




Arup, Sydney. Lighting design: Arup. Photogra-phy: Jackie Chan, Sydney.

Karavaevi Brothers Cafe – Bolshoy Levshinskiy Pereulok. Architecture and lighting design: V12 Architects / Vogeniy Shchetinkin, Lleeza Semionova, Moscow.



# Pantrac for 2-circuit track

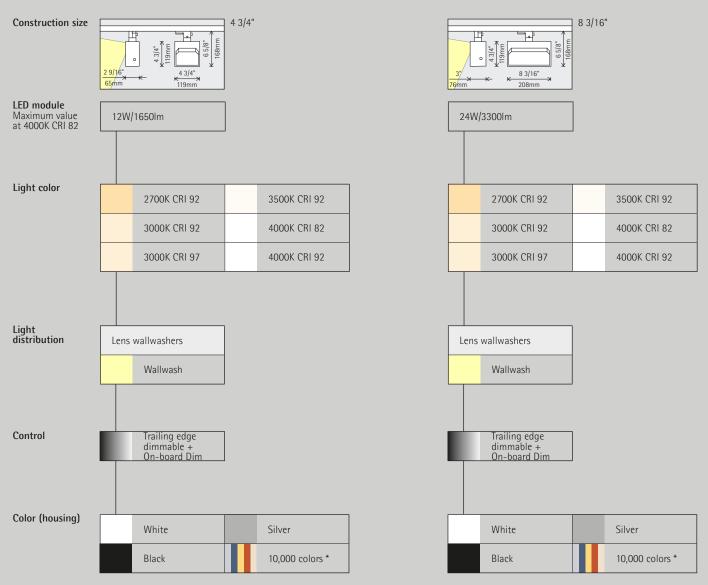



IKEA Museum, Älmhult. Lighting design: DHA Design London. Mechanical engineering: GMKI Elkonsult AB Malmö. Installation: ELUB AB Växjö. Photography: Johan Elm, Stockholm.

\* available on request

Article numbers and planning data: www.erco.com/14683-us

Design and application: www.erco.com/pantrac



